

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number  
**WO 01/26583 A1**

- (51) International Patent Classification<sup>7</sup>: **A61F 2/06**
- (21) International Application Number: **PCT/US00/28281**
- (22) International Filing Date: **12 October 2000 (12.10.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
09/416,994      13 October 1999 (13.10.1999)      **US**
- (71) Applicant: **ENDOSYSTEMS LLC [US/US]; 4001 Calle June, San Clemente, CA 92673 (US).**
- (72) Inventors: **WHITE, Geoffrey, H.; 22 Nicholson Street, Balmain East, Sydney, NSW 2041 (AU). REDMOND, Russell, J.; 1148 North Fairview Avenue, Goleta, CA 93117 (US). PLYLEY, Alan, K.; 160 N. Fairview Avenue #D183, Goleta, CA 93117 (US).**
- (74) Agent: **SUN, Raymond; 12420 Woodhall Way, Tustin, CA 92782 (US).**
- (81) Designated States (*national*): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (*regional*): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:**  
— *With international search report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **NON-FORESHORTENING INTRALUMINAL PROSTHESIS**

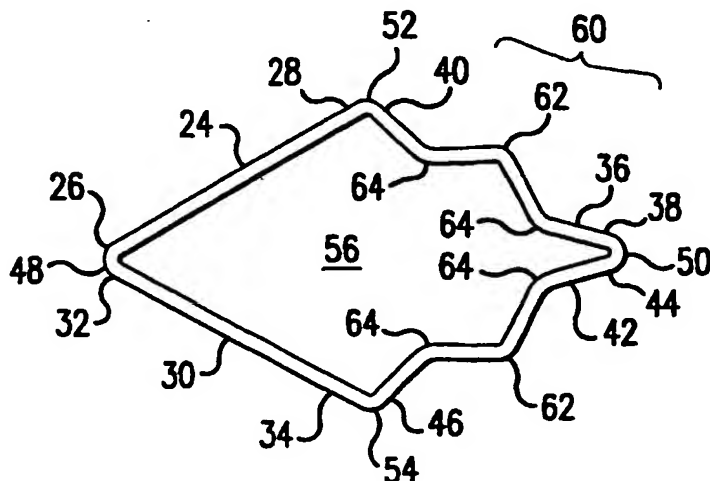

(57) Abstract: A stent has a plurality of cells (56) disposed about the circumference of the stent, with at least one cell having a plurality of struts (24, 30, 36, 42) that are connected together to form the cell. At least one strut has a compensating portion (60) of which compensates for foreshortening of the struts during expansion of the stent.

WO 01/26583 A1

NON-FORESHORTENING INTRALUMINAL PROSTHESIS

Inventors:

5 Geoffrey Hamilton White, Russell J. Redmond, Alan K. Plyley

BACKGROUND OF THE INVENTION1. Field of the Invention

The present invention relates to intraluminal prostheses  
10 for implantation into a mammalian vessel, and in particular, to  
intraluminal stents that do not experience foreshortening in the  
longitudinal direction when the stent is deployed to an expanded  
state.

2. Description of the Prior Art

15 Intraluminal prosthesis, such as stents, are commonly used  
in the repair of aneurysms, as liners for vessels, or to provide  
mechanical support to prevent the collapse of stenosed or  
occluded vessels. These stents are typically delivered in a  
compressed state to a specific location inside the lumen of a  
20 vessel or other tubular structures, and then deployed at that  
location of the lumen to an expanded state. These stents have a  
diameter in their expanded state which is several times larger  
than the diameter of the stents in the compressed state. These  
stents are also frequently deployed in the treatment of  
25 atherosclerotic stenosis in blood vessels, especially after  
percutaneous transluminal coronary angioplasty (PTCA)  
procedures, to improve the results of the procedure and to  
reduce the likelihood of restenosis.

U.S. Patent Nos. 5,733,303 (Israel et al.) and 5,827,321  
30 (Roubin et al.) describe the problems associated with the  
foreshortening of intraluminal stents when such stents are  
expanded. In addition, U.S. Patent No. 5,733,303 (Israel et  
al.) describes stents that have struts whose longitudinal length  
decreases when the stent expands, thereby causing the overall  
35 longitudinal length of the stent to foreshorten. These struts  
are connected by flexible connecting members, each having an

area of inflection that functions to compensate for the foreshortening experienced by the struts during expansion of the stent.

Unfortunately, there are certain drawbacks associated with providing flexible connecting members that have areas of inflection. First, to accommodate the areas of inflection, these connecting members often create segments within the stent where the aperture or opening defined by these connecting members have a large size. Such increased aperture size may allow increased ingrowth of tissue (also known as "in-stent restenosis"). Second, curved areas of inflection on these connecting members may cause distortion of the lumen of the stent when the stent is twisted or experiences angulation in the longitudinal direction. Third, the connecting members form an area of weakness in the stent structure which may encourage kink of the stent at the site with flexion or angulation, or which in extreme circumstances may lead to stent breakage after experiencing repetitive stress. In other words, the provision of the connecting members decreases the amount of support that the stent can enjoy.

Thus, there still remains a need for an intraluminal prosthesis that maintains a consistent length in both its fully compressed and fully expanded states, while avoiding the disadvantages set forth above. There also remains a need for a stent which can accommodate body vessels having varying lumen diameters, different anatomies, and different disease states.

#### SUMMARY OF THE DISCLOSURE

It is an object of the present invention to provide an intraluminal prosthesis that maintains a consistent length in both its fully compressed and fully expanded states.

It is another object of the present invention to provide an intraluminal prosthesis that provides increased support throughout the prosthesis while minimizing the potential for stent kink or breakage at certain regions along the stent.

It is yet another object of the present invention to provide an intraluminal prosthesis that minimizes the potential for in-stent restenosis.

In order to accomplish the objects of the present invention, there is provided a stent having a plurality of cells disposed about the circumference of the stent, with at least one cell having a plurality of struts that are connected together to form the cell. At least one strut has a portion that compensates for foreshortening of the struts during expansion of the stent.

In another embodiment, the present invention provides a stent having a plurality of cells disposed about the circumference of the stent, with at least one cell having a plurality of double-struts that are connected together to form the cell.

Thus, the stent according to the present invention maintains a consistent length in both its fully compressed and fully expanded states, and in all states between its fully compressed and fully expanded states. As a result, the stent according to the present invention facilitates accurate sizing and deployment, thereby simplifying, and possibly reducing the time needed for, the medical procedure.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a stent according to one embodiment of the present invention;

FIG. 2A is a side elevational view of a portion of the stent of FIG. 1 in its expanded state;

FIG. 2B is a side elevational view of the portion of FIG. 2A in its compressed state;

FIG. 3A is an enlarged side elevational view of a cell of the portion of FIG. 2A;

FIG. 3B illustrates the longitudinal component of a strut and its compensating portion of FIG. 3A when the stent is in its expanded state;

FIG. 3C illustrates the longitudinal component of a strut and its compensating portion of FIG. 3A when the stent is in its compressed state;

FIG. 4 illustrates a modification to the cell pattern of the stent of FIGS. 1 and 2A;

FIG. 5 is an enlarged side elevational view of a cell of portion of a stent according to another embodiment of the present invention;

FIG. 6A is a side elevational view of a portion of a stent according to another embodiment of the present invention;

FIG. 6B is a side elevational view of the portion of FIG. 6A in its compressed state;

FIG. 6C illustrates the longitudinal component of a strut and its compensating portion of FIG. 6A when the stent is in its expanded state;

FIG. 6D illustrates the longitudinal component of a strut and its compensating portion of FIG. 6A when the stent is in its compressed state;

FIGS. 7-9 are side elevational views of portions of stents according to other embodiments of the present invention;

FIG. 10 is an enlarged side elevational view of a cell of portion of a stent according to another embodiment of the present invention;

FIGS. 11-14 are side elevational views of portions of stents according to other embodiments of the present invention; and

FIG. 15A is a side elevational view of a portions of a stent according to another embodiments of the present invention;

FIG. 15B is a side elevational view of the portion of FIG. 15A in its compressed state; and

FIGS. 16-18 illustrate modifications to the cell pattern of the stent of FIG. 15.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following detailed description is of the best presently contemplated modes of carrying out the invention. This

description is not to be taken in a limiting sense, but is made merely for the purpose of illustrating general principles of embodiments of the invention. The scope of the invention is best defined by the appended claims.

5       The intraluminal prosthesis according to the present invention is a stent, although the principles of the present invention are also applicable to other prosthesis such as liners and filters. The stent is delivered to a desired location in the lumen of a body vessel in a compressed state, and is then  
10   deployed by expanding it to its expanded state. The stent maintains substantially the same length in both its fully compressed and fully expanded states.

      The stent according to the present invention can be a self-expanding stent, or a stent that is radially expandable by  
15   inflating a balloon or expanded by an expansion member, or a stent that is expanded by the use of radio frequency which provides heat to cause the stent to change its size. The stent may also be coated with coverings of PTFE, dacron, or other biocompatible materials to form a combined stent-graft or  
20   endovascular prosthesis. The vessels in which the stent of the present invention can be deployed include but are not limited to natural body vessels such as ducts, arteries, trachea, veins, ureters and the esophagus, and artificial vessels such as grafts.

25       A stent 20 according to the present invention is illustrated in FIGS. 1, 2A and 3A in its expanded state. Referring to FIG. 1, the stent 20 has a tubular configuration and is made up of a plurality of cells that are comprised of generally V-shaped struts connected at their apices. FIGS. 2A  
30   and 2B illustrate a portion of the stent 20 in greater detail, and FIG. 3A illustrates one cell 22. Each cell 22 has a first strut 24 having a first end 26 and a second end 28, a second strut 30 having a first end 32 and a second end 34, a third strut 36 having a first end 38 and a second end 40, and a fourth  
35   strut 42 having a first end 44 and a second end 46. The first

ends 26 and 32 of the first and second struts 24 and 30, respectively, are connected at a first apex 48, and the first ends 38 and 44 of the third and fourth struts 36 and 42, respectively, are connected at a second apex 50. The second  
5 ends 28 and 40 of the first and third struts 24 and 36, respectively, are connected to form a third apex 52, and the second ends 34 and 46 of the second and fourth struts 30 and 42, respectively, are connected to form a fourth apex 54, so that the four struts 24, 30, 36 and 42 together form an aperture or  
10 open space 56.

As shown in FIG. 2A, the first apex 48 of each cell 22 is connected to the second apex 50 of a longitudinally adjacent cell 22, and the third apex 52 of each cell 22 is connected to the fourth apex 54 of a transversely adjacent cell 22. For  
15 purposes of the present invention, cells 22 can be provided in longitudinal rows and transverse columns. Therefore, the first and second apices 48 and 50 of adjacent cells 22 are connected to form a row R of cells 22, while the third and fourth apices 52 and 54 of adjacent cells 22 are connected to form a column C  
20 of cells 22.

The struts 24, 30, 36 and 42 would normally experience foreshortening when the stent 20 is expanded. Therefore, any of the struts 24, 30, 36 and 42 can be provided with a compensating portion 60 that functions to compensate for the foreshortening  
25 experienced by the struts 24, 30, 36 and 42 during expansion of the stent 20. As shown in greater detail in FIG. 3A, each compensating portion 60 has at least one point of inflection. In the non-limiting example shown in FIG. 3A, the compensating portion 60 has three points of inflection 62 and 64 that are  
30 inflected in directions opposite to each other. One point of inflection 62 can be considered to be an external point of inflection since it extends outside the confines of the cell 22 as defined by the struts 24, 30, 36 and 42. Similarly, each of the other two points of inflection 64 can be considered to be an  
35 internal point of inflection since it extends into the aperture

56. Each compensating portion 60 can be provided along any portion of the strut 36 and 42, and slopes downwardly from one end of the strut 36 and 42 to an internal point of inflection 64, at which point it slopes upwardly to the external point of inflection 62, then slopes downwardly to the other internal point of inflection 64, before sloping upwardly again towards the other end of the strut 36 or 42. Thus, each compensating portion 60 has a plurality of alternating segments that are defined by the points of inflection 62 and 64.

As best shown in FIG. 2A, the pattern of cells 22 can define a second pattern of cells 22x that have about the same configuration as the cells 22, but reversed about a vertical axis defined by apices 52 and 54 to form a substantial mirror image of the cells 22. Each of the second cells 22x is defined by a separate strut from four separate cells 22. Like the cells 22, these second cells 22x are also arranged to form rows and columns of cells 22x.

Referring to FIG. 2B, when the stent 20 is in the compressed state, the internal points of inflection 64 are adjacent to each other. However, it is possible to position the compensating portions 60 along the third and fourth struts 36 and 42 so that the points of inflection 62, 64 can be nested within each other when the stent 20 is compressed. In such a case, when the stent 20 is compressed, an internal point of inflection 64 of the third strut 36 can be nested or fitted inside the space defined by an external point of inflection 62 of the fourth strut 42, and an internal point of inflection 64 of the fourth strut 42 can nested or fitted inside the space defined by an external point of inflection 62 of the third strut 36.

As another example, it is possible to also provide the compensating portions 60 for the first and second struts 24 and 30, in addition to or in lieu of the compensating portions 60 for the third and fourth struts 36 and 42. For example, FIG. 10 illustrates a cell 22 where each strut 24, 30, 36 and 42 has a



compensating portion 60.

The compensating portions 60 function to compensate for the longitudinal foreshortening experienced by the struts 24, 30, 36, 42, thereby maintaining the stent 20 at substantially the same length at all times. This is accomplished by providing the compensating portions 60 with a natural bias and a springy nature, which together with its alternating segments, combine to shorten its length  $l_1$  (see FIG. 3B) when compressed (i.e.,  $l_2$  in FIG. 3C is less than  $l_1$ ). When allowed to expand, each compensating portion 60 is biased to return to its natural or original position, which increases its length from  $l_2$  to  $l_1$  to compensate for the foreshortening experienced by the longitudinal component of each strut 24, 30, 36, 42.

This effect is illustrated in FIGS. 2A, 2B, 3A, 3B and 3C. When the stent 20 is in its compressed state, the compensating portion 60 has an actual length which is less than its actual length when the compensating portion 60 is in its expanded state. When the compensating portion 60 is in the compressed state, its alternating segments have a higher amplitude and a smaller wavelength than when it is in the expanded state (compare FIGS. 3B and 3C). Thus, this difference between the actual lengths of the compensating portion 60 in its two compressed and expanded states compensates for the difference between  $l_1$  and  $l_2$  of the struts 36 and 42, so that the longitudinal lengths  $L_1$  and  $L_2$  of the strut (e.g., 36) are the same in both the compressed and expanded states. The lines 70 and 72 in FIGS. 2A and 2B also show that the relevant portion of the stent 20 does not experience any foreshortening.

FIG. 4 illustrates a modification to the cell pattern for stent 20 shown in FIG. 2A. In particular, the cell pattern 20a in FIG. 4 provides a plurality of straight connecting members 80 that connect the first and second apices 48 and 50, respectively, of adjacent cells 22 in a longitudinal row R. These straight connecting members 80 can increase the flexibility of the stent, primarily in the longitudinal

direction, but also to a small degree in the radial direction. In addition, one or more of these straight connecting members 80 can be omitted, either randomly or in a pattern (e.g., in a spiral pattern) to increase the flexibility of the stent at  
5 desired locations.

Although the compensating portions 60 have been described in FIGS. 1-3 as assuming a particular configuration, it will be appreciated by those skilled in the art that the compensating portions 60 can assume other configurations without departing  
10 from the spirit and scope of the present invention. For example, the compensating portion 60 can be modified so that each has two points of inflection. This is illustrated in FIG. 5, where the third strut 36 has a compensating portion 60a that has one external point of inflection 62a and one internal point  
15 of inflection 64a, and the fourth strut 42 has a compensating portion 60a that has one external point of inflection 62a and one internal point of inflection 64a.

FIGS. 6-9 illustrate another type of compensating portion 90 according to the present invention which is configured to be  
20 a generally incomplete or C-shaped circle provided at one or more apices of the cells. For example, referring to FIG. 6A, each cell 22b is essentially the same as cell 22 in FIG. 3A, except that the compensating portions 60 have been replaced by compensating portions 90b that are provided at the location of  
25 the first and second apices 48 and 50 in such a manner that the first and second apices 48 and 50 are replaced by these compensating portions 90b. Each compensating portion 90b has a generally incomplete circular or C-shaped configuration, extending from the first end 26b, 32b, 38b or 44b of one of the  
30 struts 24b, 32b, 36b or 42b, respectively, then curling around in a circular fashion to the first end 26b, 32b, 38b or 44b of the adjacent strut 24b, 32b, 36b or 42b, respectively. The elements of the cell 22b that are the same as the elements of the cell 22 in FIG. 3A are provided with the same numeral  
35 designations except that a "b" has been added to the numeral

designations in FIG. 6A.

Each compensating portion 90b of each cell 22b is longitudinally (i.e., along a row) connected to a compensating portion 90b of an adjacent cell 22b by a straight connecting member 80b. The compensating portions 90b function in the same manner as the compensating portions 60 to compensate for the longitudinal foreshortening experienced by the struts 24b, 30b, 36b, 42b. In this regard, the generally circular curved configuration of the compensating portions 90b has one area of inflection 95 so that each compensating portion 90b has a shortened longitudinal length L2 when compressed, but has an increased longitudinal length L1 when allowed to expand so as to compensate for the foreshortening experienced by the longitudinal component of each strut 24b, 30b, 36b, 42b. This effect is illustrated in FIGS. 6B, 6C and 6D.

FIG. 7 illustrates a stent pattern in which each cell 22c is essentially the same as cell 22b in FIG. 6A, except that the compensating portions 90c are now provided at the third and fourth apices 52 and 54, respectively, in such a manner that the third and fourth apices 52 and 54 are replaced by these compensating portions 90c. Each compensating portion 90c has the same configuration as compensating portion 90b. The elements of the cell 22c that are the same as the elements of the cell 22b in FIG. 6A are provided with the same numeral designations except that a "c" has been added to the numeral designations in FIG. 7. Each compensating portion 90c of each cell 22c can be transversely (i.e., along a column) connected to a compensating portion 90c of an adjacent cell 22c by a straight connecting member 80c.

The principles illustrated in FIGS. 6A and 7 can be combined. For example, FIG. 8 illustrates a stent pattern in which each cell 22d has compensating portions 90d provided at all four apices 48, 50, 52 and 54, in such a manner that each of the four apices 48, 50, 52 and 54 is replaced by a compensating portion 90d. Each compensating portion 90d of each cell 22d can

cell 22d can be either longitudinally or transversely connected to a compensating portion 90d of an adjacent cell 22d by a straight connecting member 80d. The elements of the cell 22d that are the same as the elements of the cells 22b and 22c are provided with the same numeral designations except that a "d" has been added to the numeral designations in FIG. 8.

In addition, FIG. 9 illustrates a stent pattern which is the same as the stent pattern in FIG. 8, except that the connecting members 80d are omitted. Thus, each compensating portion 90e of each cell 22e in FIG. 9 is directly connected, either longitudinally or transversely, to a compensating portion 90e of an adjacent cell 22e. The elements of the cell 22e that are the same as the elements of the cell 22d are provided with the same numeral designations except that an "e" has been added to the numeral designations in FIG. 9.

FIGS. 11 and 12 illustrate different types of compensating portions according to the present invention that embody the underlying principles described in connection with FIGS. 6-9. In FIG. 11, each cell 22g shares a compensating portion 90g with each longitudinally adjacent cell 22g. In particular, each compensating portion 90g is shaped like a sideways "S", with the top of the "S" coupled to a first cell 22g at the location of (and replacing) the first apex 48, and with the bottom of the "S" coupled to a longitudinally adjacent second cell 22g at the location of (and replacing) the second apex 50 of the second cell 22g. Thus, the sideways "S" shape of each compensating portion 90g defines two areas of inflection 100 and 102 that function to provide the compensation needed to avoid foreshortening according to the principles set forth in FIGS. 2-9 above. Otherwise, the elements of the cell 22g in FIG. 11 that are the same as the elements of the cell 22 in FIG. 3A are provided with the same numeral designations except that a "g" has been added to the numeral designations in FIG. 11.

Similarly, in FIG. 12, each cell 22h shares a compensating portion 90h with each longitudinally adjacent cell 22h. In

particular, each compensating portion 90h is configured like the compensating portion 90b in FIG. 6, except that a first end 106 of the compensating portion 90h is connected to the first end 44h of the fourth strut 42h of a first cell 22h, with the  
5 compensating portion 90h curling around in a circular fashion to its second end 108, which is connected to the first end 32h of the second strut 30h of a longitudinally adjacent second cell 22h. The first end 38h of the third strut 36h of the first cell 22h is connected to the compensating portion 90h between the  
10 first and second ends 106 and 108 thereof, and the first end 26h of the first strut 24h of the second cell 22h is connected to the compensating portion 90h between the second end 108 and the first end 38h of the third strut 36h of the first cell 22h. Thus, the compensating portion 90h defines one area of  
15 inflection 110 between two longitudinally adjacent cells 22h that functions to provide the compensation needed to avoid foreshortening according to the principles set forth in FIGS. 2-9 above. Otherwise, the elements of the cell 22h in FIG. 12 that are the same as the elements of the cell 22 in FIG. 3A are  
20 provided with the same numeral designations except that an "h" has been added to the numeral designations in FIG. 12.

It is not necessary that the struts 24, 30, 36, 42 be straight. In this regard, the present invention provides cells having curved struts that provide at least one area of  
25 inflection to provide the compensation needed to avoid foreshortening according to the principles set forth in FIGS. 2-10 above. As a non-limiting example, FIG. 13 illustrates a stent pattern in which the cells 22i are essentially the same as the cell 22 in FIG. 3A, except that each strut 24i, 30i, 36i and  
30 42i is now completely curved. Otherwise, the elements of the cell 22i in FIG. 13 that are the same as the elements of the cell 22 in FIG. 3A are provided with the same numeral designations except that an "i" has been added to the numeral designations in FIG. 13.

35 The cells 22j in the stent pattern in FIG. 14 borrow from

the principles illustrated in FIGS. 3A and 13. Each strut in the cells 22j are made up of two strut pieces that have their respective ends connected at the apices 48j, 50j, 52j and 54j. In particular, the first strut 24j has an accompanying inner  
5 strut piece 24k whose ends are also connected to the apices 48j and 52j, the second strut 30j has an accompanying inner strut piece 30k whose ends are also connected to the apices 48j and 54j, the third strut 36j has an accompanying inner strut piece 36k whose ends are also connected to the apices 50j and 52j, and  
10 the fourth strut 42j has an accompanying inner strut piece 42k whose ends are also connected to the apices 50j and 54j. Each strut 24j, 30j, 36j, 42j and its accompanying inner strut piece 24k, 30k, 36k, 42k defines a smaller cell 120, 122, 124, 126, respectively. In this embodiment, the inner strut pieces 24k,  
15 30k, 36k, 42k are shorter than each corresponding strut 24j, 30j, 36j, 42j.

Providing double struts to make up the desired cells 22j can provide certain benefits. First, the double-strut structure may increase the strength of the stent by providing radial and  
20 longitudinal resistance to compression and other changes in shape. Second, the resulting stent may have an increased expansion ratio. Third, the double-strut structure may reduce the tendency of the stent to recoil. Fourth, the resulting stent may have increased stent coverage and cells that have  
25 smaller sizes, thereby minimizing tissue in-growth. The double-strut embodiment of FIG. 14 can be especially useful in applications where the prosthesis requires increased support throughout the prosthesis while minimizing the potential for stent kink or breakage at certain regions along the stent.

30 FIG. 15A illustrates a stent 20m in which the cells 22m are essentially the same as the cell 22i in FIG. 13, except that each strut 24m, 30m, 36m and 42m has less curvature. In fact, each strut 24m, 30m, 36m and 42m has one internal point of inflection 64m and one external point of inflection 62m.  
35 Otherwise, the elements of the cell 22m in FIG. 15 that are the

same as the elements of the cell 22i in FIG. 13 are provided with the same numeral designations except that an "m" has been added to the numeral designations in FIG. 15. Similar to FIG. 2A, the pattern of cells 22m can define a second pattern of cells 22y that have about the same configuration as the cells 22m, but reversed about a horizontal axis defined by the apices 48m and 50m. Like the cells 22m, these second cells 22y are also arranged to form rows and columns of cells 22y. Each of the second cells 22y is defined by a separate strut from four separate cells 22m. FIG. 15B illustrates the stent 20m in the compressed state. One difference between the cell 22m and the other cells 22 herein is that the apex 54m in each cell 22m is inverted internally into the cell 22m, as opposed to extending externally from the cell 22m.

While the embodiments illustrated hereinabove illustrate stent patterns that are made up entirely of cells 22 that have compensating portions 60, it is also possible to intersperse cells that do not have any compensating portions 60. These principles will be illustrated in FIGS. 16-18 using the cell pattern 22m of FIG. 15. Referring first to FIG. 16, a stent 20m is illustrated as having a central portion 150 made up of a plurality of conventional zig-zag struts that do not have any compensating portions, and which form diamond-shaped cells 152.

The two ends of the stent 20m is made up of the cell pattern 22m illustrated in FIG. 15. This configuration provides more rigidity in the central portion 150, and is better suited for use, for example, in the carotid arteries where more calcified lesions can be found at about the central portion 150, and where there is more potential for embolization in the central portion 150. This is because the diamond-shaped cells 152 are better suited to minimize embolization and prevent tissue in-growth.

FIG. 17 illustrates a stent 20n having a first portion 154 made up of a plurality of conventional zig-zag struts that do not have any compensating portions, and which form diamond-shaped cells 152, and a second portion 156 that is made up of

the cell pattern 22m illustrated in FIG. 15. The first portion 154 can be used to support a body vessel at a location that requires more rigidity, and the second portion 156 can be used to support a body vessel at a location that requires more flexibility. This configuration is better suited for use, for example, in the iliac arteries where the origin of the iliac arteries might have more calcified lesions where the first portion 154 would be intended to support.

FIG. 18 illustrates a stent 20p having rows 158 of cells 22m separated by one or more rows of the diamond-shaped cells 152. The rows 158 can be individual rows of cells 22m, or a plurality of rows of cells 22m. This configuration is useful in distributing the radial strength of the stent 20p while allowing for nonforeshortening and increased flexion at the desired locations (i.e., supported by the cells 22m). This configuration is best suited for use, for example, with curved vessels such as external iliac arteries.

A number of materials can be used to fabricate the stent 20 (including its struts 24, 30, 36, 42 and connecting members 80), depending on its method of deployment. These materials include, but are not limited to, Nitinol (which is a shape memory superelastic metal alloy whose use in stents is well-documented in the literature), stainless steel, tantalum, titanium, elgiloy, gold, platinum, or any other metal or alloy, or polymers or composites, having sufficient biocompatibility, rigidity, flexibility, radial strength, radiopacity and antithrombogenicity.

The stent 20 can be made from one of a number of methods, depending on the material of the stent 20 and the desired nature of deployment.

In a non-limiting first preferred method, the stent 20 is fabricated from a solid Nitinol tube with dimensions that are identical to the stent 20 when it is in the fully compressed state. The pattern of the stent 20 (i.e., its cells 22) is programmed into a computer-guided laser cutter which cuts out



the segments between the struts and the connecting members (if any) in a manner which closely maintains the outside diameter and wall thickness of the stent 20.

After the cutting step, the stent 20 is progressively  
5 expanded until it reaches its fully expanded state. The expansion can be performed by an internal expansion fixture, although other expansion apparatus and methods can be used without departing from the spirit and scope of the present invention. The overall length of the stent 20 must be  
10 consistently maintained throughout the expansion of the stent 20 from its fully compressed to its fully expanded states.

Once the stent 20 has been expanded to its fully expanded state, it is heat-treated to "set" the shape memory of the Nitinol material so that it will fully return to its expanded  
15 dimensions at a temperature that is near body temperature. The stent 20 is then cleaned and electro-polished.

The next step is to compress the stent 20 again into a dimension which allows for delivery into a vessel, either through percutaneous delivery or through minimally invasive  
20 surgical procedures. Specifically, the stent 20 must be compressed into a smaller state so that it can be delivered by a delivery device to the desired location of the vessel. Any conventional delivery device could be used, such as but not limited to a tube, catheter, or sheath. This compression is  
25 accomplished by cooling the stent 20 to a low temperature, for example, zero degrees Celcius, and while maintaining this temperature, compressing the stent 20 to allow the stent 20 to be inserted inside the delivery device. Once inserted inside the delivery device, the stent 20 is held by the delivery device  
30 in the compressed state until it is released within the lumen of a vessel, at which time the stent will fully re-expand to its "set" dimensions as it equilibrates with body temperature.

In a non-limiting second preferred method, a balloon-expandable stent 20 can be fabricated by connecting a plurality  
35 of wires that have been bent or formed into the desired shapes

for the struts 24, 30, 36, 42 and connecting members 80. The connection can be accomplished by welding, tying, bonding, or any other conventional method. Alternatively, wire electro-discharge machining or a computer guided laser cutter can be used. The wires are capable of experiencing plastic deformation when the stent 20 is compressed, and when the stent 20 is expanded. Upon plastic deformation of the stent 20 to either the compressed or the expanded state, the stent 20 remains in this state until another force is applied to plastically deform the stent 20 again.

While certain methods of manufacture have been described above, it will be appreciated by those skilled in the art that other methods of manufacture can be utilized without departing from the spirit and scope of the present invention.

The stent 20 can be deployed by a number of delivery systems and delivery methods. These delivery systems and methods will vary depending on whether the stent 20 is expanded by self-expansion, radial expansion forces, or radio frequency. These delivery methods are well-known in the art, and shall not be described in greater detail herein.

Thus, the present invention provides a stent having struts that include portions that compensate for the foreshortening effect. As a result, connecting members can be omitted from the stent designs according to the present invention, leading to at least the following benefits. First, cell sizes can be decreased so as to minimize "in-stent restenosis", and to provide better support to the vessel. Second, the stent can be provided with a more uniform structure that distributes any angulation or flexion of the stent more evenly along the full length of the stent, so that the stent can experience a more gradual curvature at bends rather than experiencing undesirable kinking at such regions. This further minimizes breakage or other damage to the stent. Of course, connecting members can be optionally added to increase the flexibility of the stent at certain desired areas.

While the description above refers to particular embodiments of the present invention, it will be understood that many modifications may be made without departing from the spirit thereof. The accompanying claims are intended to cover such  
5 modifications as would fall within the true scope and spirit of the present invention.

What is claimed is:

1. A stent comprising:

a plurality of cells disposed about the circumference of the stent, with at least one cell having a plurality of struts that are connected together to form the cell, with at least one strut having a compensating portion that compensates for foreshortening of the struts during expansion of the stent.

2. The stent of claim 1, further including a connecting member for coupling two adjacent cells.

3. The stent of claim 1, wherein the compensating portion has at least one area of inflection.

4. The stent of claim 1, wherein the compensating portion has an internal area of inflection and an external area of inflection.

5. The stent of claim 1, wherein each of the struts has a compensating portion.

6. The stent of claim 1, wherein each of the plurality of cells has four struts that define a generally diamond-shaped configuration having four apices, with a compensating portion provided at one of the apices.

7. The stent of claim 6, wherein a compensating portion is provided at two of the apices.

8. The stent of claim 6, wherein a compensating portion is provided at all the apices.

9. The stent of claim 6, wherein the compensating portion is C-shaped.

10. The stent of claim 6, wherein the compensating portion is connects apices between two adjacent cells.

11. The stent of claim 10, wherein the compensating  
5 portion is S-shaped.

12. The stent of claim 10, wherein the compensating portion is C-shaped.

10 13. The stent of claim 1, wherein each strut is completely curved.

14. The stent of claim 1, wherein the plurality of cells is a first plurality of cells that defines a first plurality of  
15 rows and columns, and wherein the stent further includes a second plurality of cells that defines a second plurality of rows and columns.

15. The stent of claim 14, wherein the configuration of  
20 the first plurality of cells is a substantial mirror image of the second plurality of cells.

16. The stent of claim 1, wherein the plurality of cells is a first plurality of cells that is provided along a first  
25 length of the stent, and wherein the stent further includes a second plurality of cells that is provided along a second length of the stent.

17. The stent of claim 1, wherein the compensating portion  
30 is curved.

18. The stent of claim 1, wherein each cell has a plurality of apices that are defined by the plurality of struts, and each of the plurality of struts includes a first strut and a second strut to define a double-strut configuration, with each  
5 of the first and second struts having a first end and a second end, wherein the first ends of the first and second struts are connected to a first apex, and the second ends of the first and second struts are connected to a second apex.

10 19. The stent of claim 18, wherein the first and second struts of each of the plurality of struts defines a space therebetween.

20. A stent comprising a plurality of cells disposed about  
15 the circumference of the stent, with at least one cell having a plurality of double-struts that are connected together to form the cell.

21. The stent of claim 20, wherein each cell has a  
20 plurality of apices that are defined by the plurality of double-struts, and with each of double-struts having a first end and a second end, wherein the first ends of the double-struts are connected to a first apex, and the second ends of the double-struts are connected to a second apex.

25 22. The stent of claim 21, wherein each double-strut defines a space therebetween.

1/17

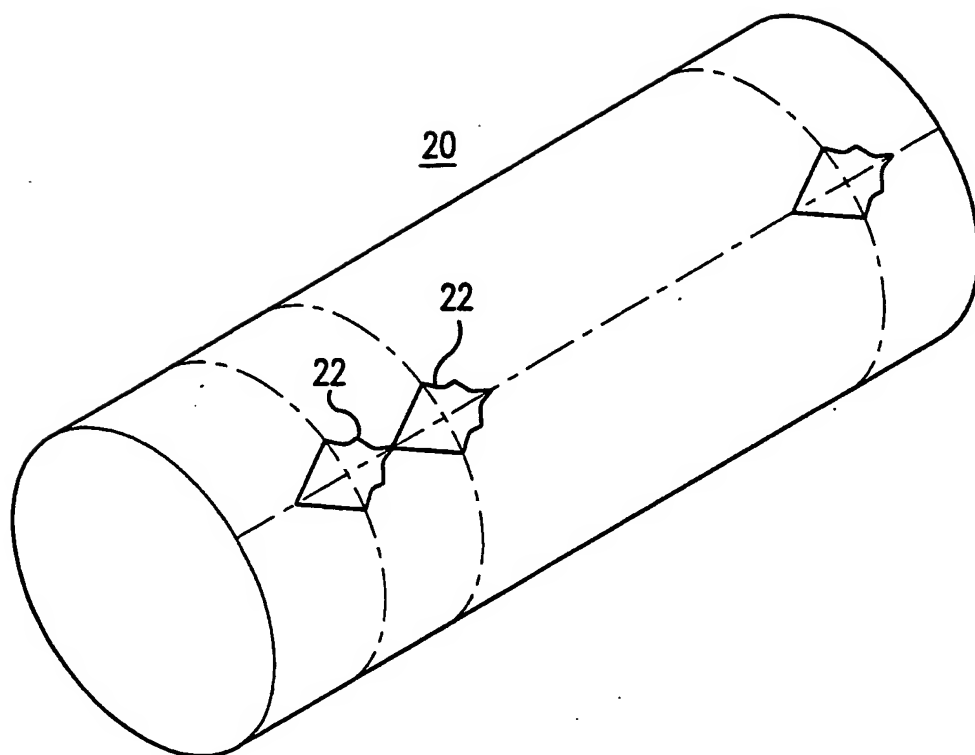
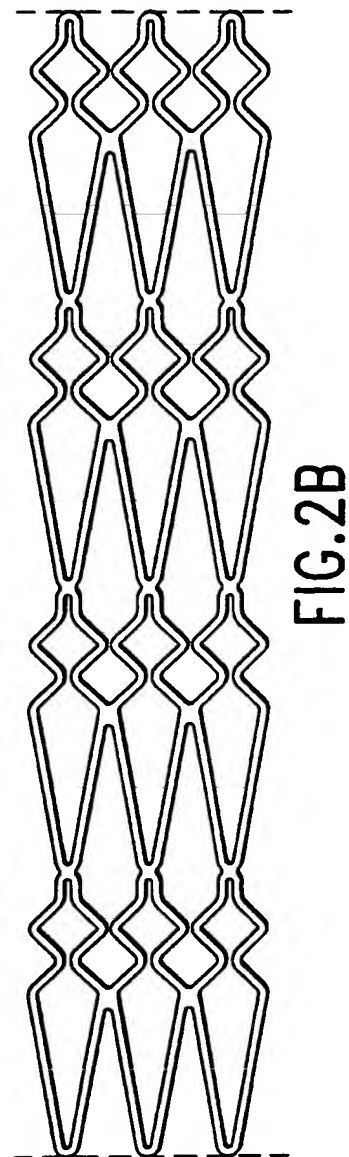
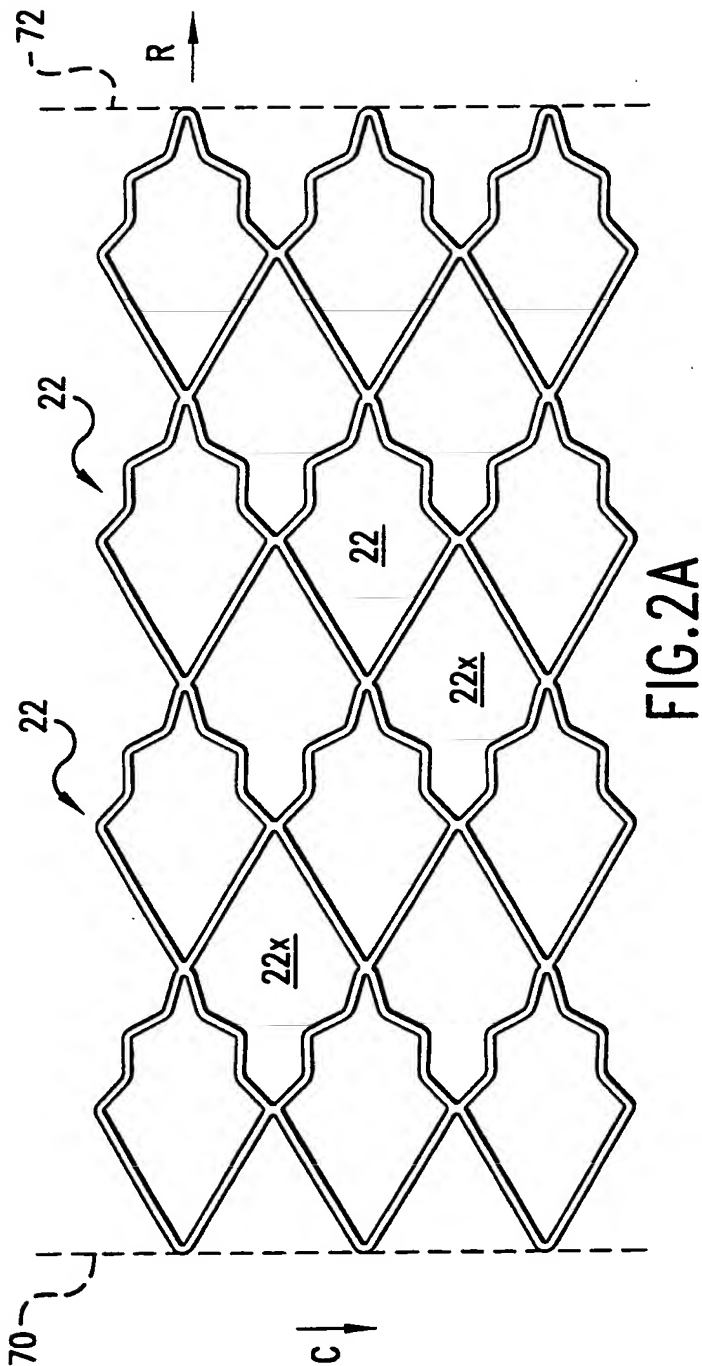


FIG. 1

2/17





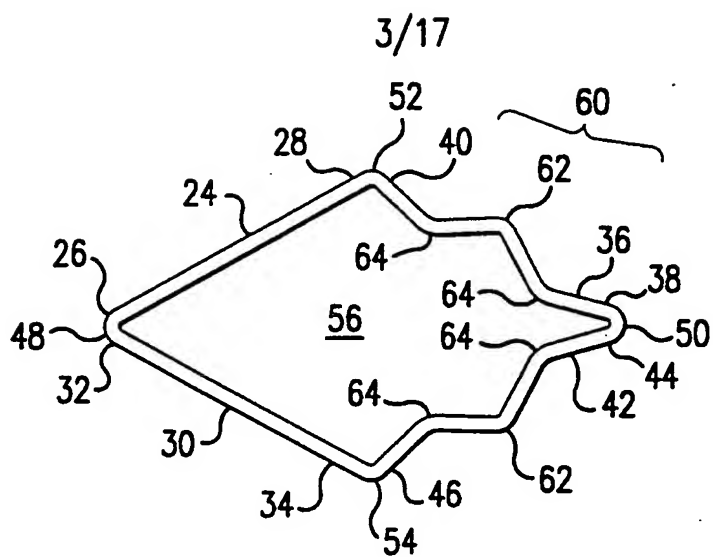


FIG. 3A

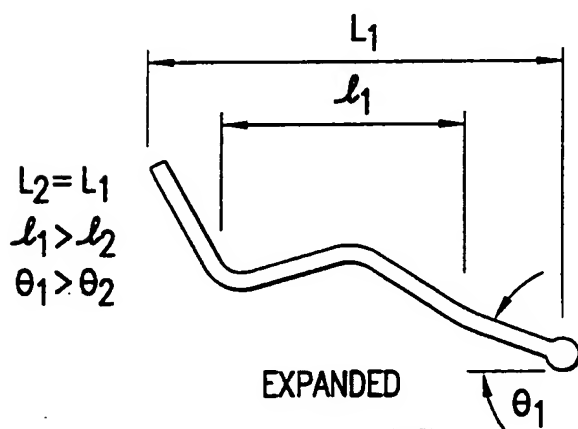


FIG. 3B

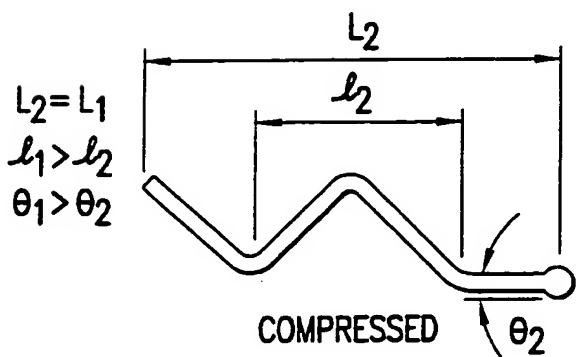


FIG. 3C

4/17

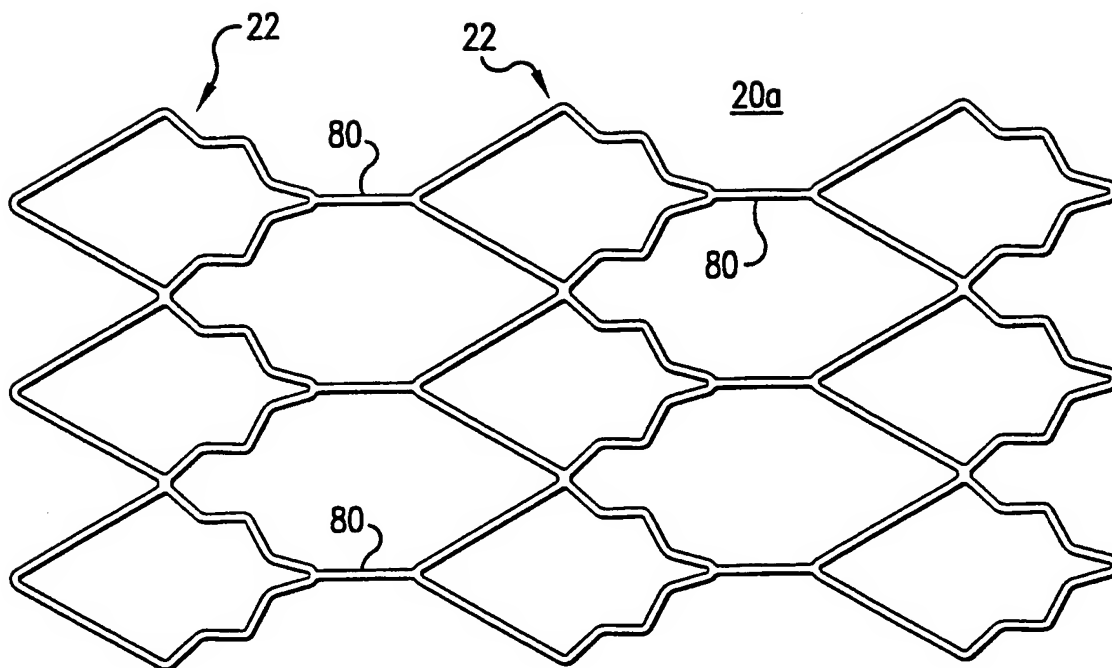


FIG. 4

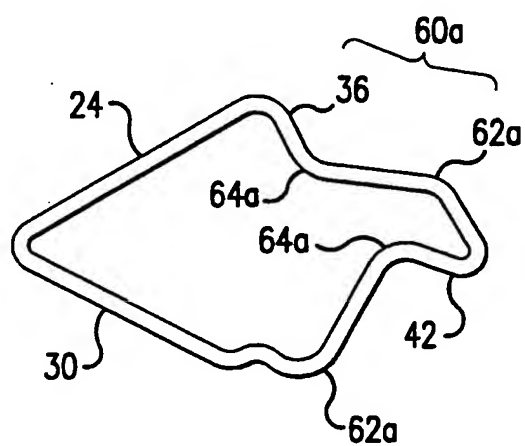


FIG. 5

5/17

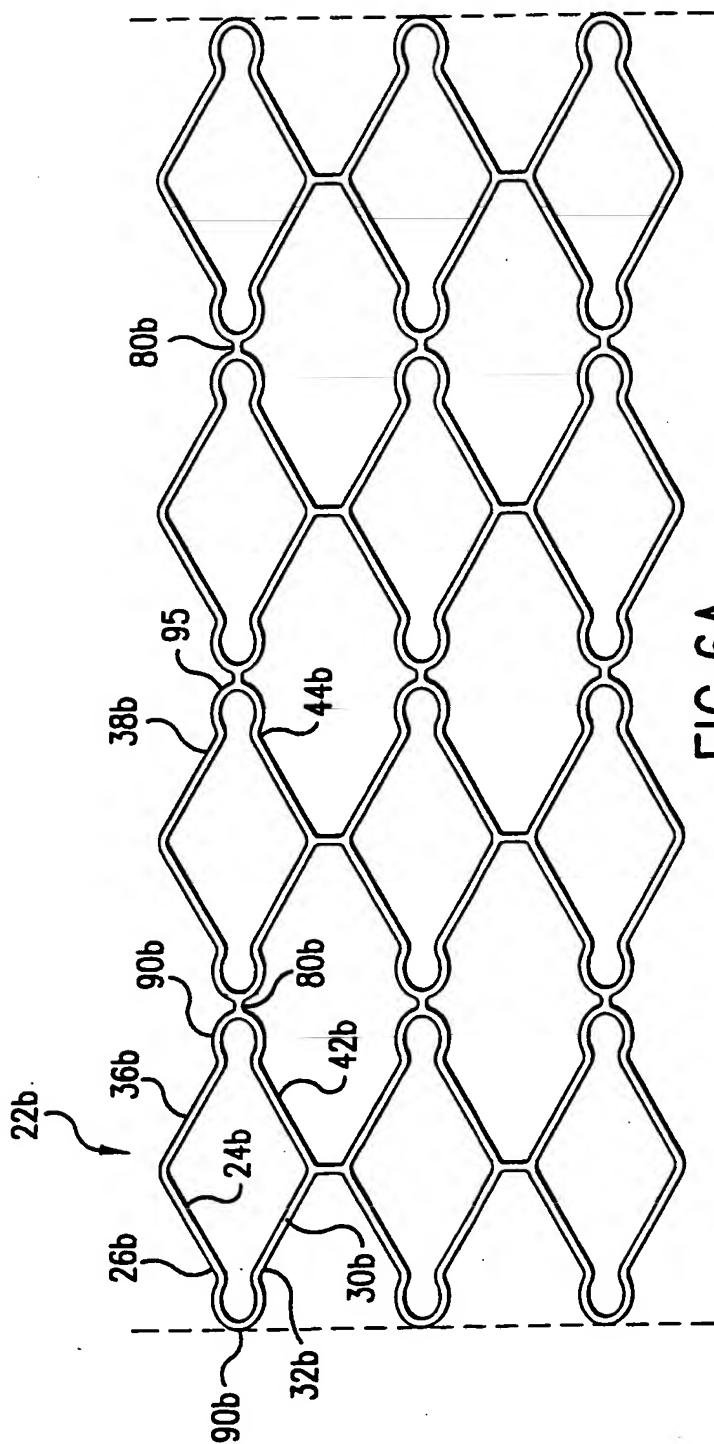


FIG. 6A

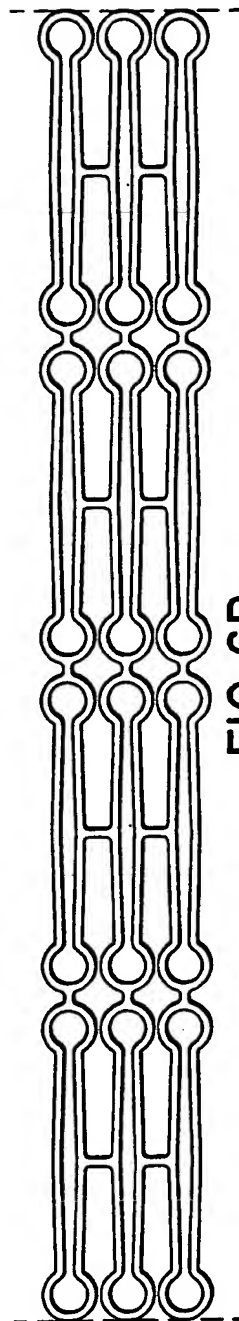


FIG. 6B

6/17

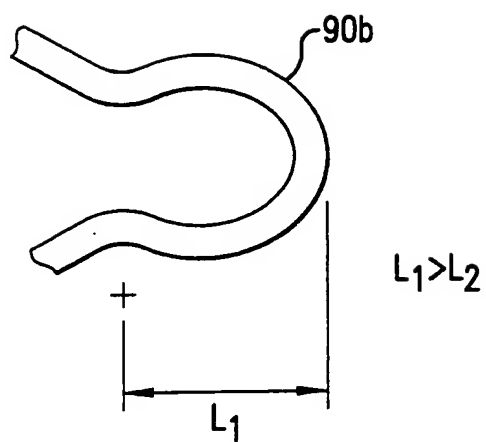


FIG. 6C

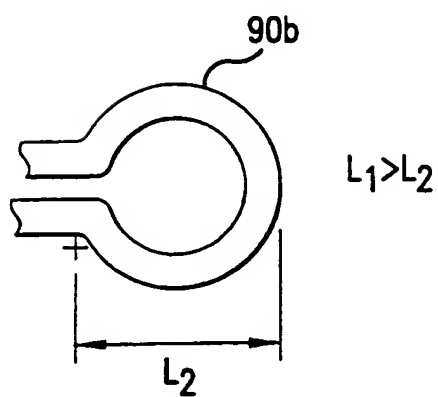


FIG. 6D

7/17

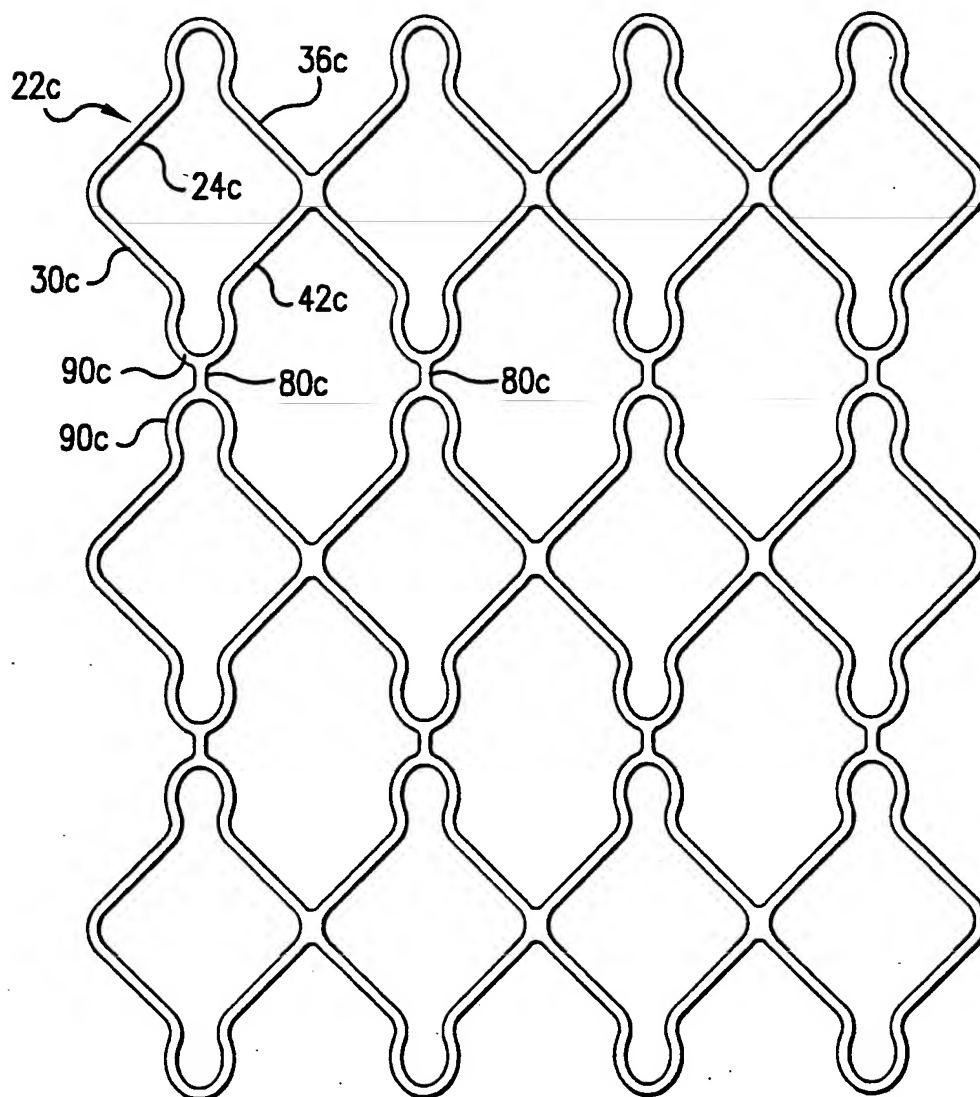


FIG.7

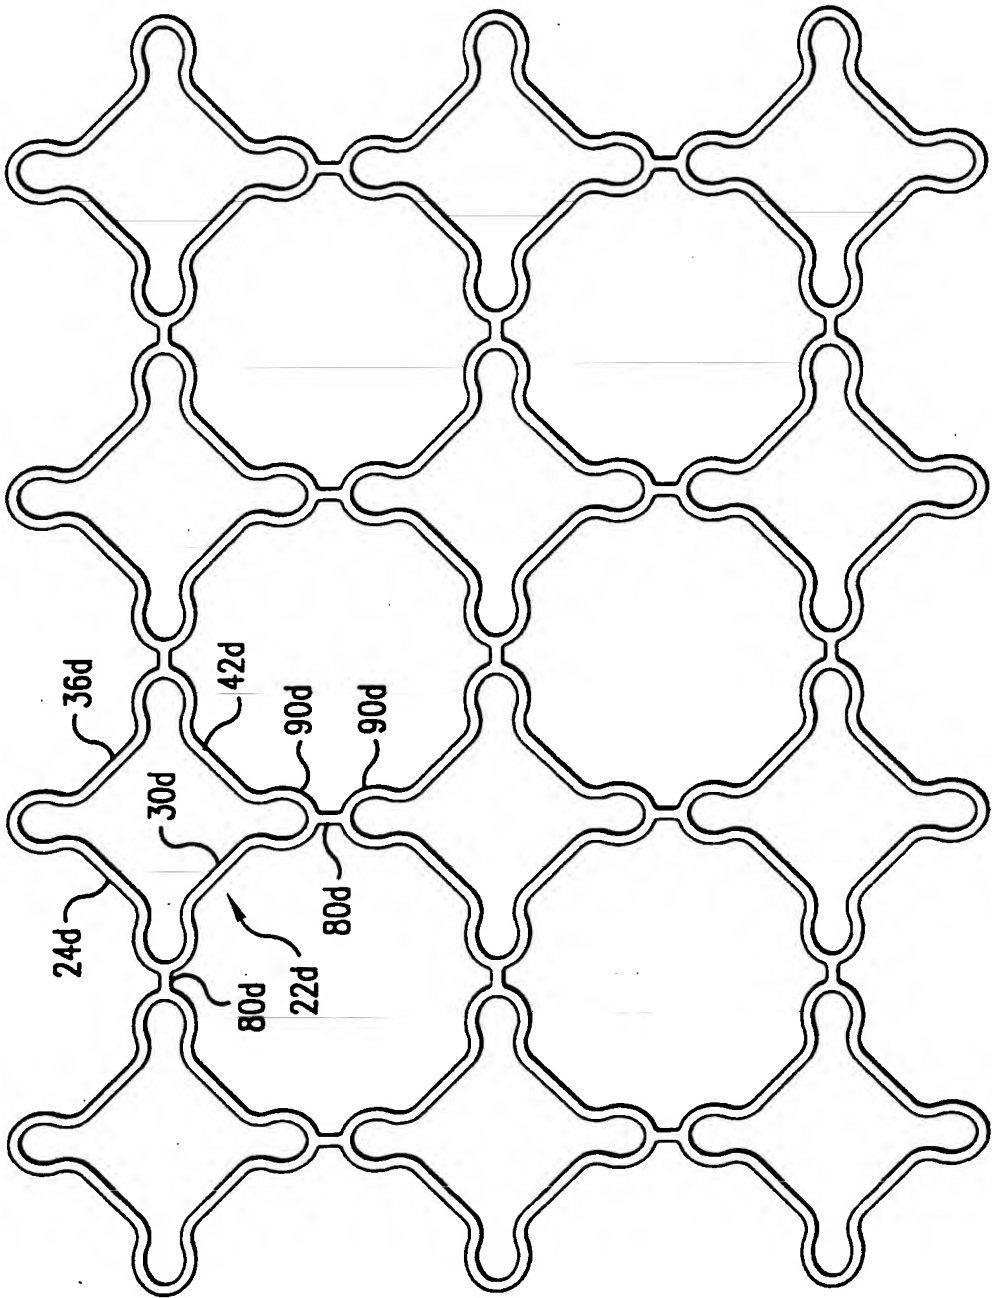


FIG.8

9/17

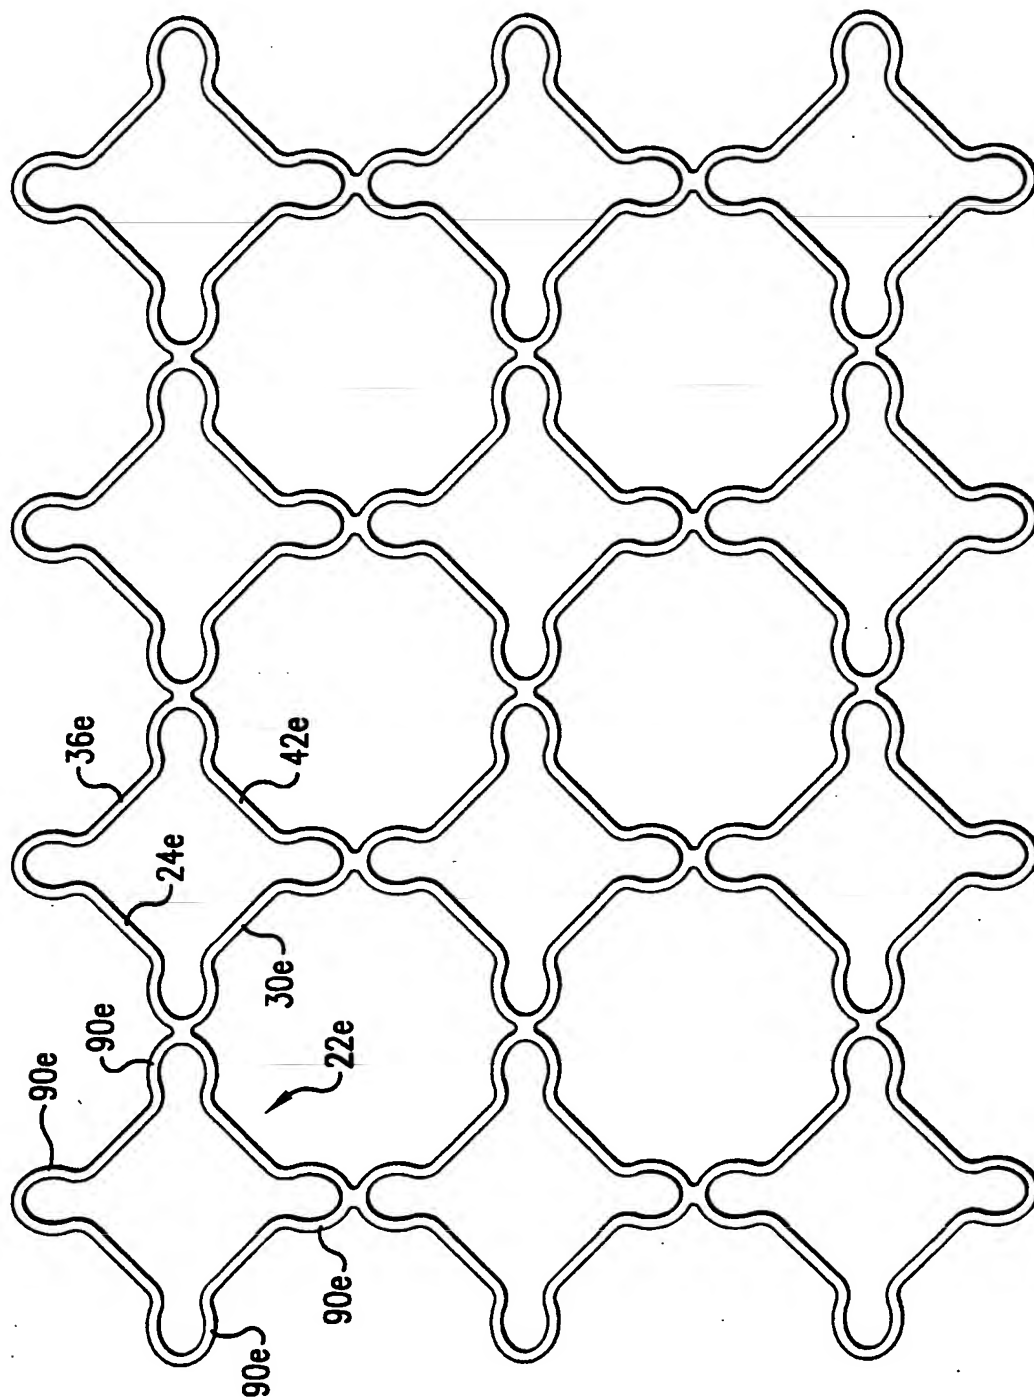


FIG. 9

10/17

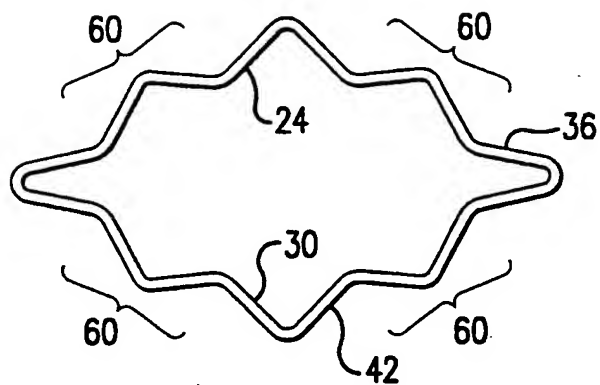


FIG. 10

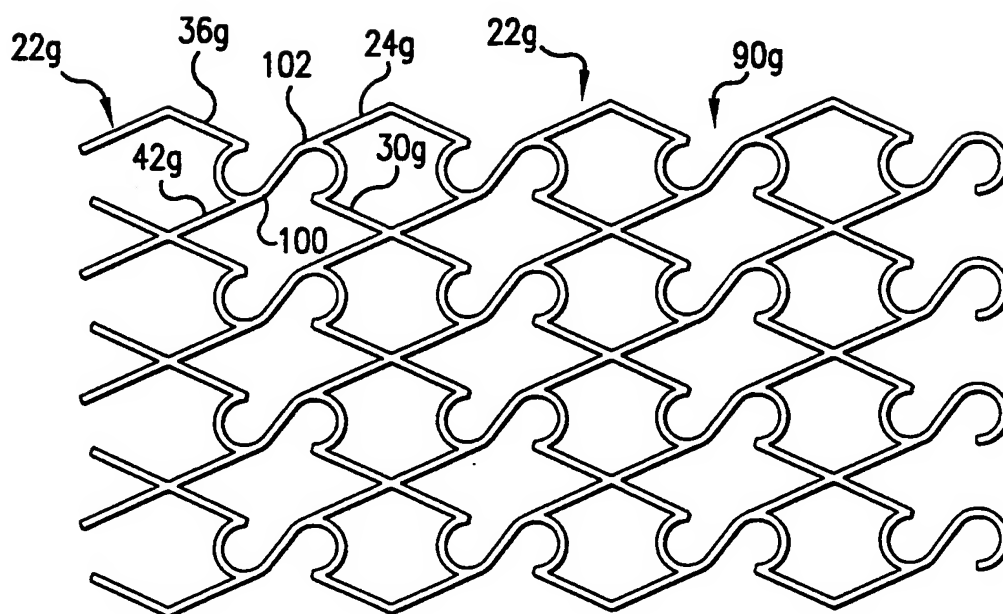
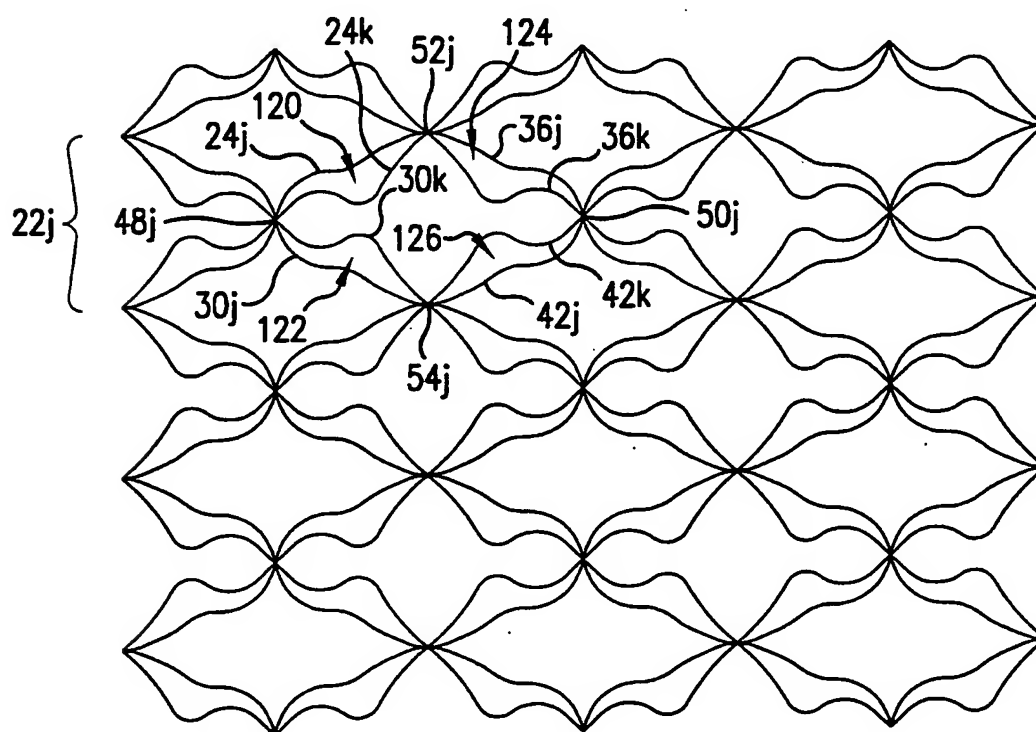
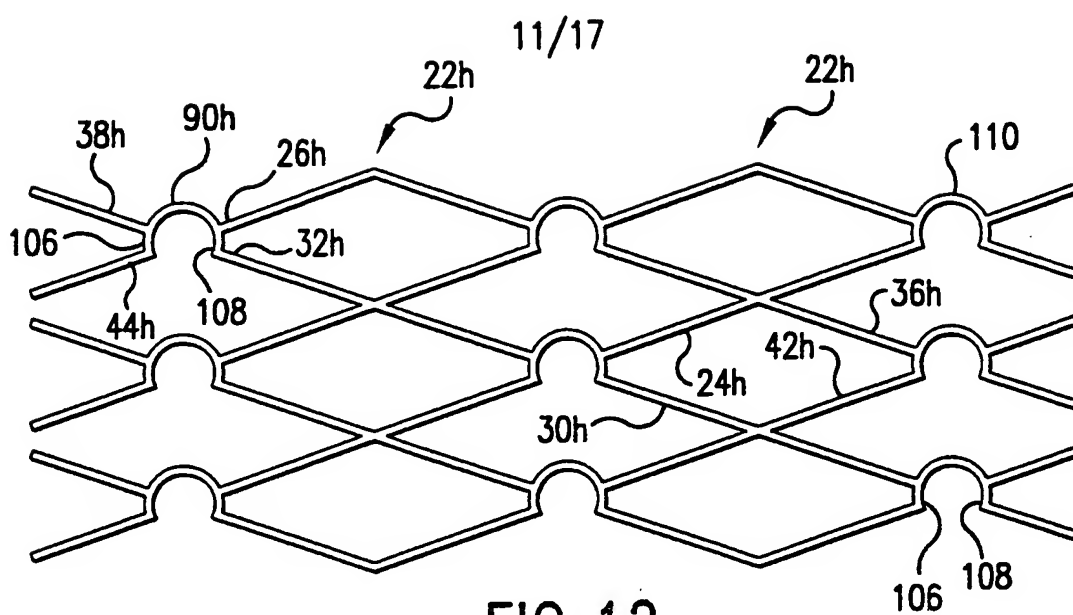


FIG. 11





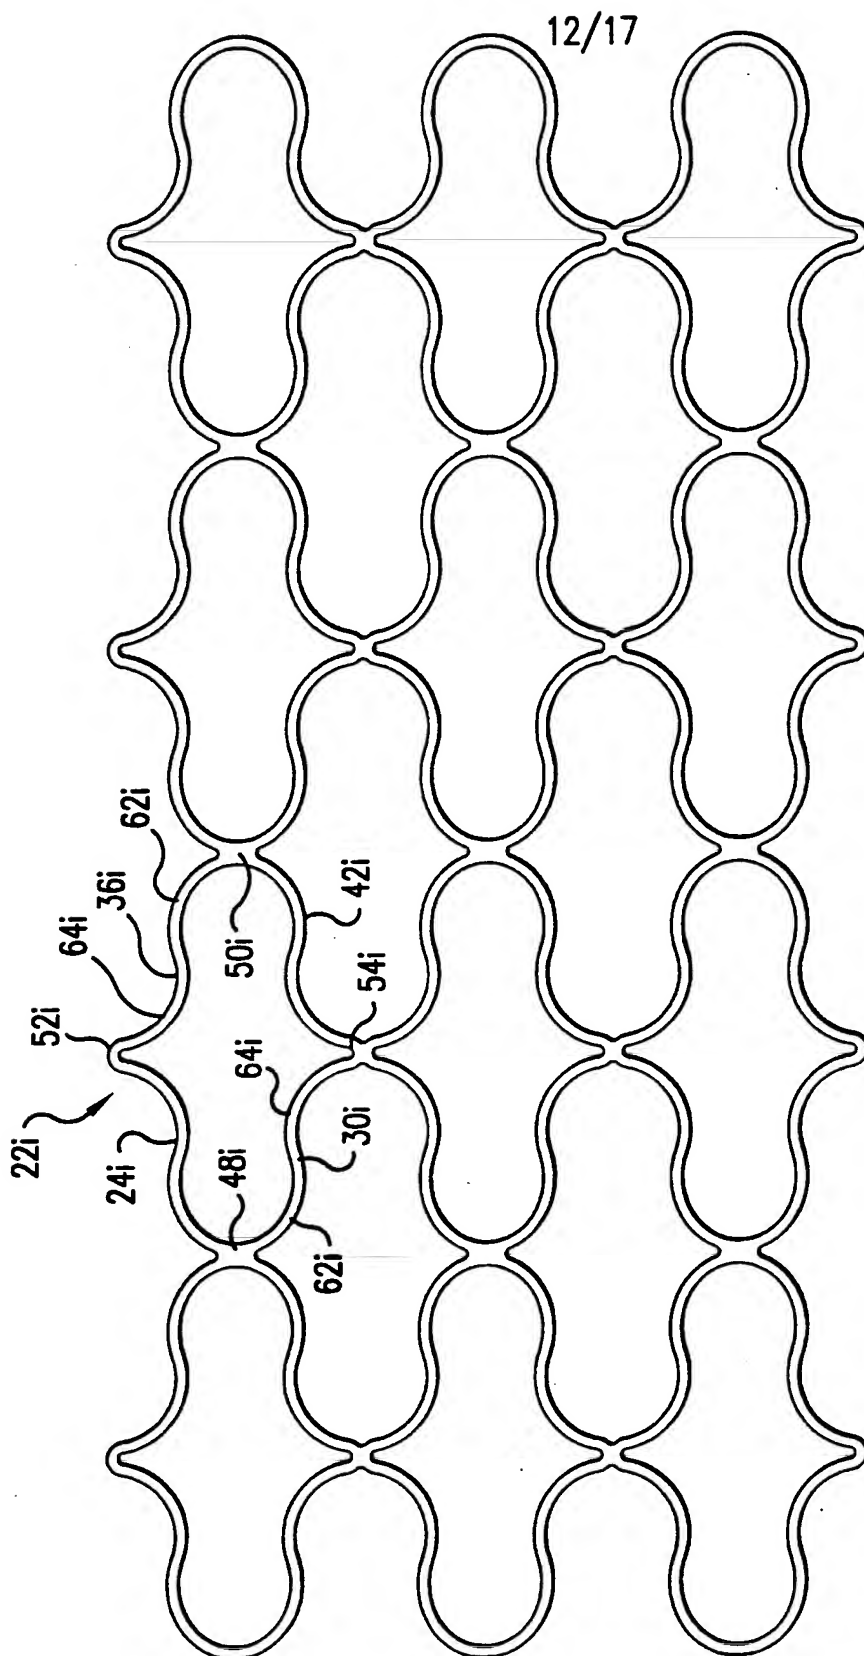


FIG. 13

13/17

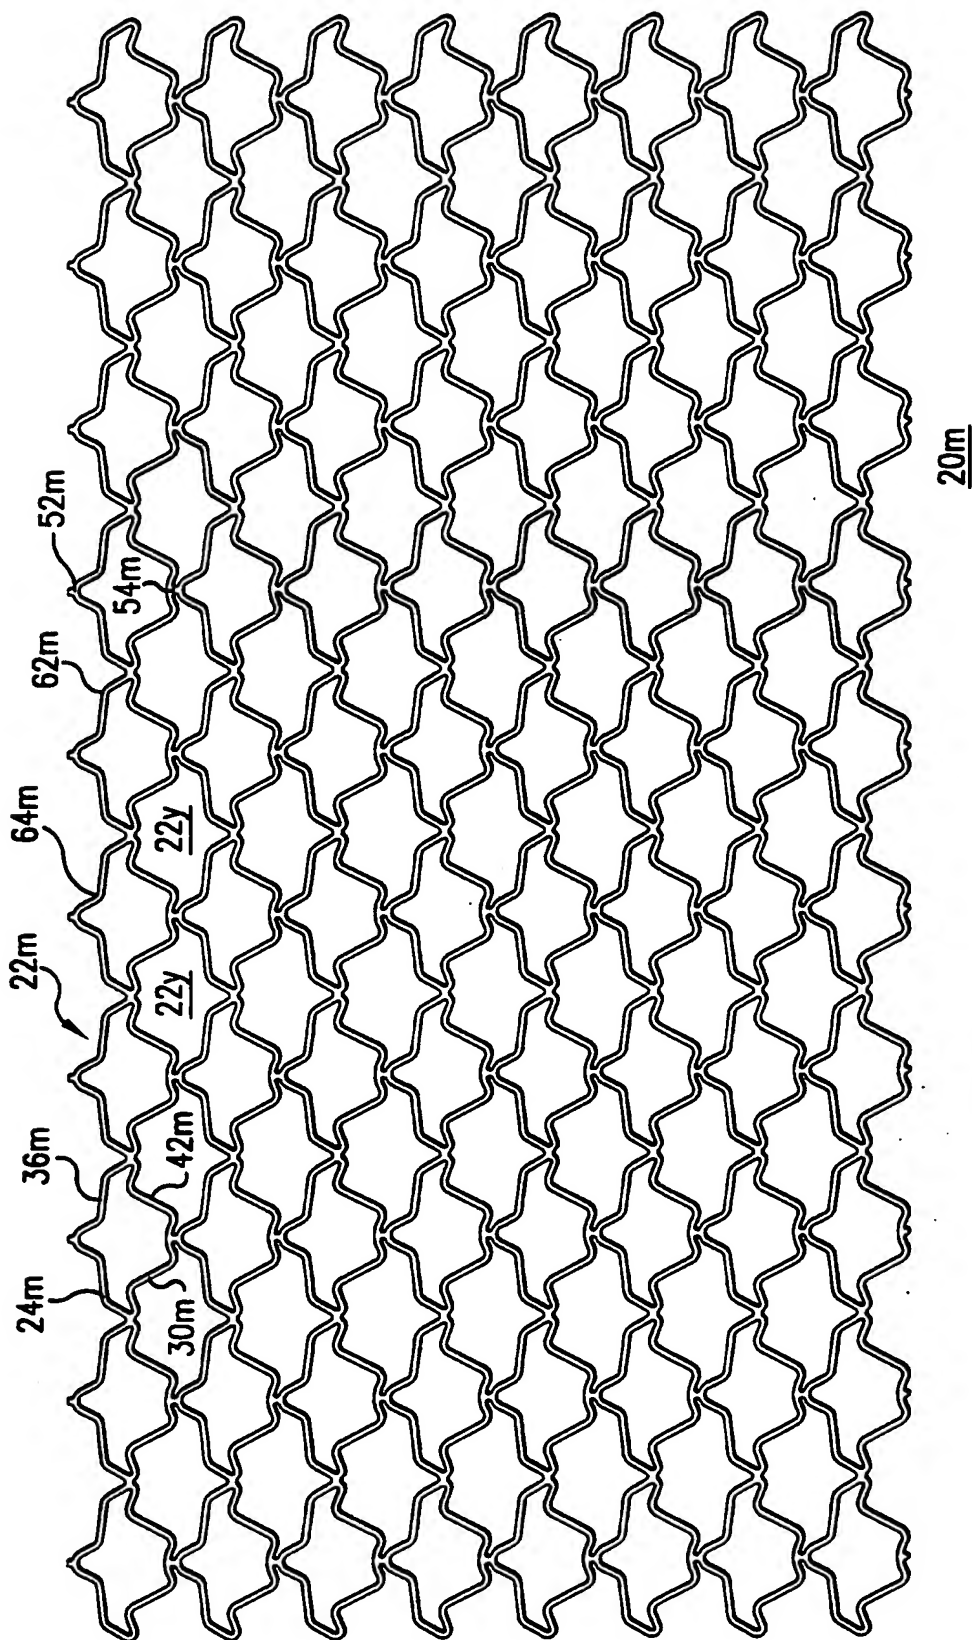


FIG. 15A

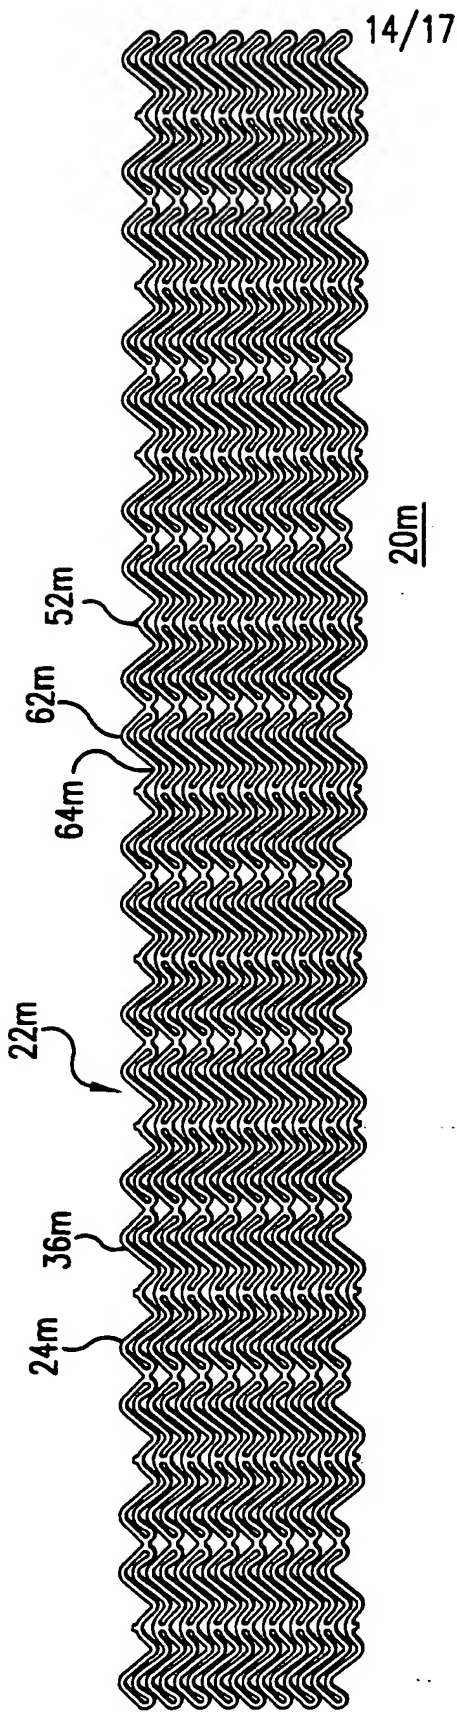


FIG. 15B

15/17

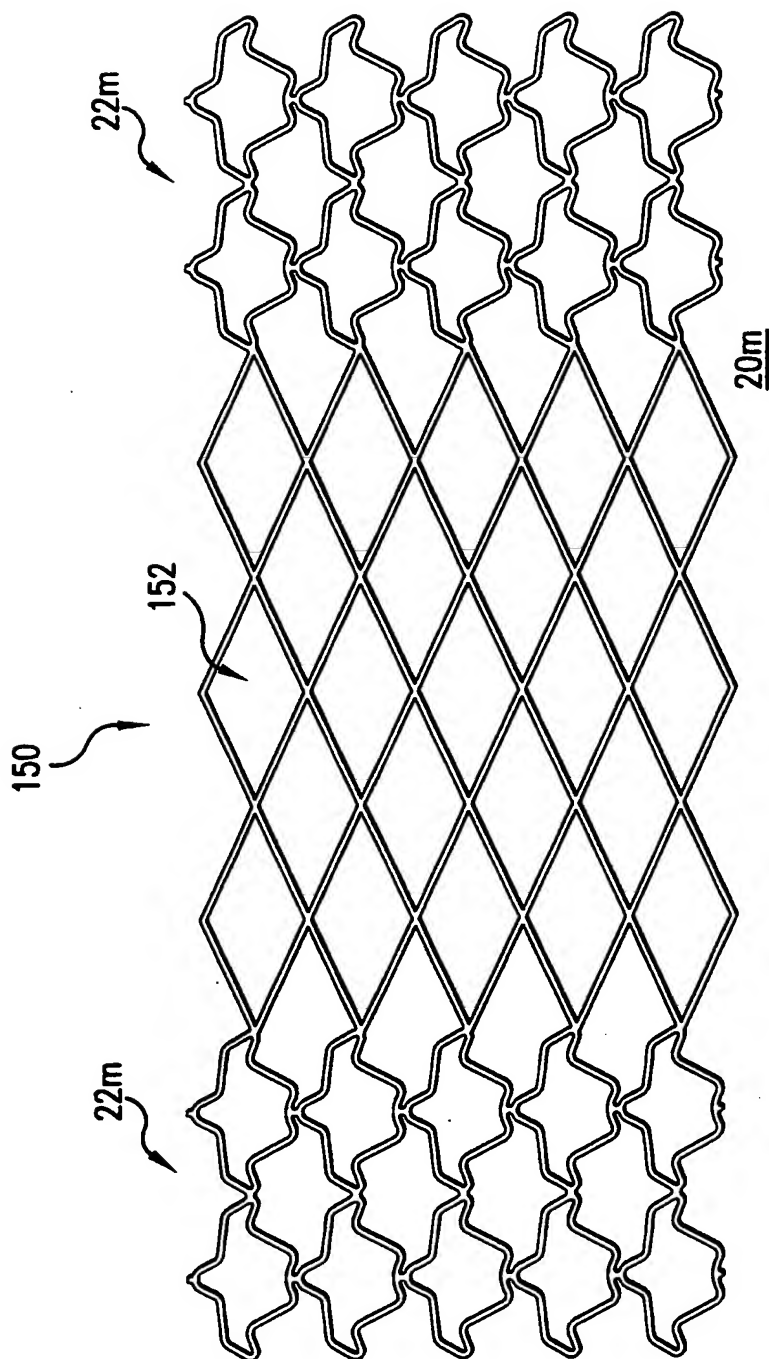


FIG. 16

16/17

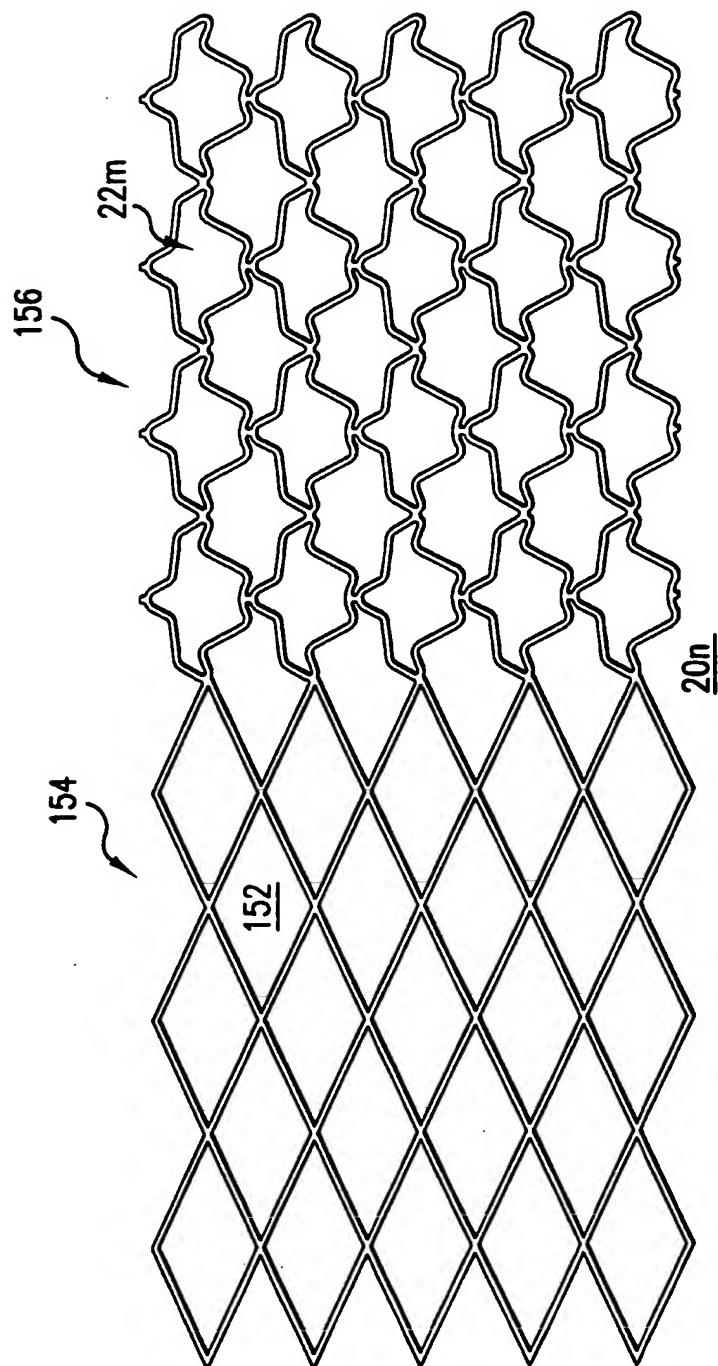


FIG. 17

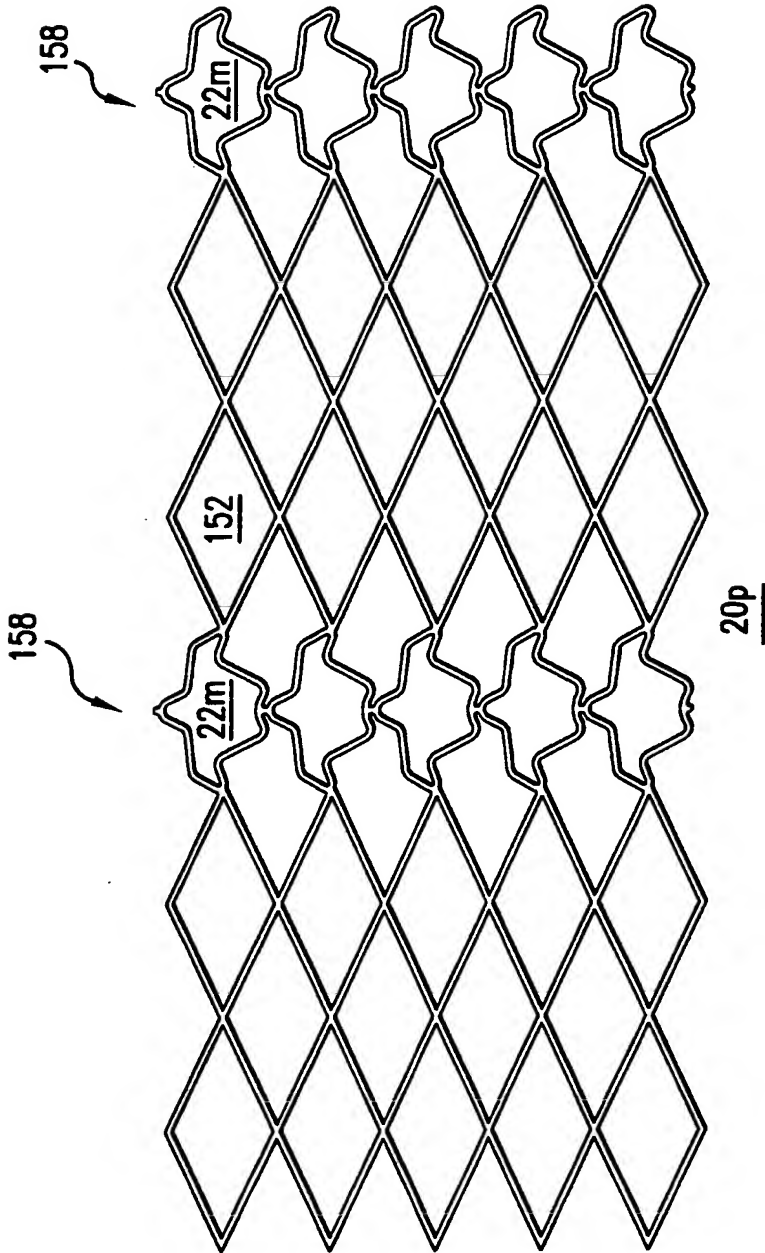


FIG. 18

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/28281

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : A61F 2/06

US CL : 623/1.15, 1.16, 1.17

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 623/1.15, 1.16, 1.17

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST and WEST

search terms: cells, apertures, stent, struts, links, diamond, connector

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,776,183 A (Kanesaka et al) 7 July 1998, col. 4, lines 51, 52 and Fig. 6.	1-3, 5-10, 12, 17 ----- 13
X, E	US 6,132,461 A (Thompson) 17 October 2000, col. 5, lines 27, 28, 50, 51 and col. 6, lines 39-45. See also Figs. 3 and 13.	1, 2, 4, 5-8, 14, 15, 18-22
X --- Y	US 5,913,895 A (Burpee et al) 22 June 1999, col. 2, lines 39-44, 51-55 and Figs. 2, 5.	1, 3-8, 10, 11, 14-17 ----- 9, 12
X, P	US 5,980,552 A (Pinchasik et al) 9 November 1999, col. 4, lines 29-31, Fig. 3C.	1-5, 14-17

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

01 DECEMBER 2000

Date of mailing of the international search report

09 JAN 2001

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Michael Milano

Telephone No. (703) 308-2496